



**MINIMUM INSTALLATION RADIUS FOR FILCOTEN PAVE SLOT TOP 4" NW100
39.40" AND 19.70" (1000mm AND 500mm) LONG**

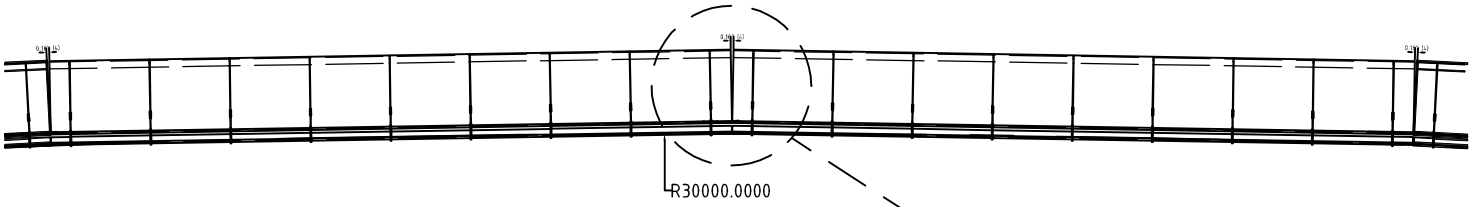

* For a minimum internal radius of 30m or 100ft
FILCOTEN will use standard 1 meter trench drain
and Slot Top, the gaps will be 0.16" (4mm).

NOTES:
TIGHTER RADIUS ARE AVAILABLE BY SPECIAL ORDER.
PLEASE SUBMIT TO US YOUR REQUEST INCLUDING THE DWG FILE.

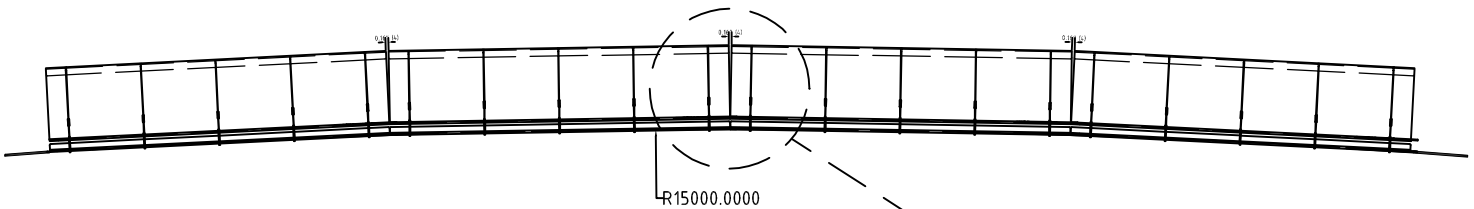

* For a minimum internal radius on 15m or 50ft
FILCOTEN will use standard 0.5 meter trench drain
and Slot Top, the gaps will be 0.16" (4mm).