

## PINCH (CRIMP/EAR) CLAMP

### MATERIAL

- STAINLESS STEEL
- CORROSION RESISTANCE GREATER THAN/EQUAL TO 1000h

### MECHANICAL


- CLAMP EAR; FAST & SIMPLE, VISIBLE DEFORMATION CONFIRMS CLOSURE
- DIMPLE; INCREASES CLAMP FORCE
- MECHANICAL INTERLOCK KEEPS CLAMP SECURELY CLOSED AND REDUCES CORROSION

### CLOSING FORCE

- 6MM EAR WIDTH: 1200 N MAX FORCE
- 9&10MM EAR WIDTH: 2000 N MAX FORCE

### STAINLESS BAND

0.024" (0.6MM) THICK BAND  
0.28" (7.0 MM) WIDE BAND

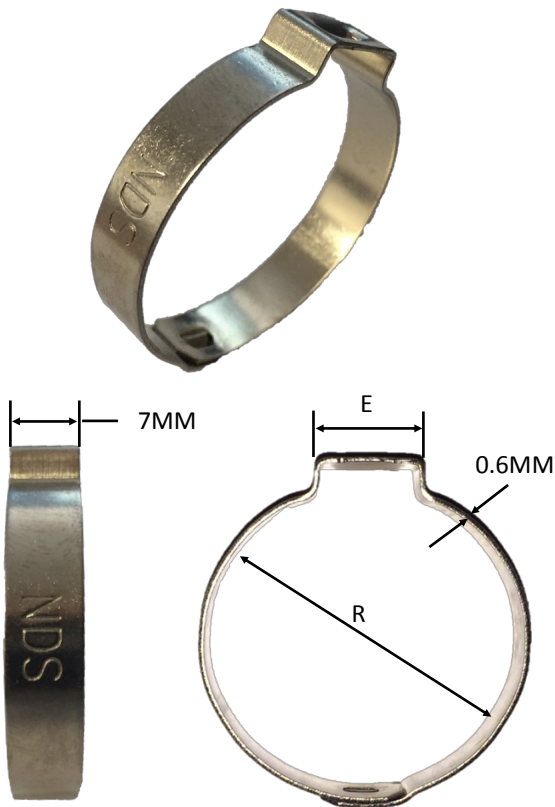

NDS PART #	REF #	EAR WIDTH (MM) "E"	OPEN / CLOSE RANGE (MM) "R"	OPEN / CLOSE RANGE (INCHES) "R"
NC-155000-003	0133.0R	6	11.4 - 13.3	0.45 - 0.52
NC-155000-008	0157.0R	6	13.5 - 15.7	0.53 - 0.62
NC-155000-009	0170.0R	6	15.1 - 17.0	0.59 - 0.67
NC-155000-010	0185.0R	9	15.7-18.5	0.62 - 0.73
NC-155000-011	0198.0R	9	17.0 - 19.8	0.67 - 0.78
NC-155000-012	0210.0R	9	18.2 - 21.0	0.72 - 0.83
NC-155000-013	0226.0R	9	19.8 - 22.6	0.78 - 0.89
NC-155000-015	0256.0R	9	22.8 - 25.6	0.90 - 1.01
NC-155000-016	0271.0R	10	24.0 - 27.1	0.94 - 1.07
NC-155000-017	0286.0R	10	25.5 - 28.6	1.00 - 1.13
NC-155000-019	0316.0R	10	28.5 - 31.6	1.12 - 1.24
NC-155000-020	0331.0R	10	30.0 - 33.1	1.18 - 1.30
NC-155000-021	0346.0R	10	31.5 - 34.6	1.24 - 1.36
NC-155000-022	0361.0R	10	33.0 - 36.1	1.30 - 1.42
NC-155000-025	0396.0R	10	36.5 - 39.6	1.44 - 1.56
NC-155000-026	0410.0R	10	37.9 - 41.0	1.49 - 1.61
NC-155000-027	0425.0R	10	39.4 - 42.5	1.55 - 1.67
NC-155000-028	0440.0R	10	40.9 - 44.0	1.61 - 1.73
NC-155000-031	0485.0R	10	45.4 - 48.5	1.79 - 1.91
NC-155000-032	0500.0R	10	46.9 - 50.0	1.85 - 1.97
NC-155000-033	0515.0R	10	48.4 - 51.5	1.91 - 2.03
NC-155000-039	0605.0R	10	57.4 - 60.5	2.26 - 2.38
NC-155000-040	0620.0R	10	58.9 - 62.0	2.32 - 2.44
NC-155000-042	0650.0R	10	61.9 - 65.0	2.44 - 2.56