
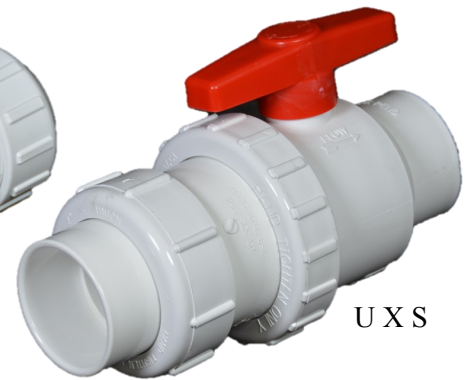


CHECKMATE

SWING CHECK VALVE AND BALL VALVE COMBINATION

RATED @125 PSI STATIC PRESSURE @ 72°F
 MOLDED IN THE USA
 MADE OF PVC TYPE I
 EPDM & POLYETHYLENE O-RING'S
 BUNA COMPRESSION GASKET

IPS—IRON PIPE SIZE (SAME AS SCH. 40 PIPE)
 “S” - SLIP CONNECTION
 “U” - UNION CONNECTION
 “UC” - COMPRESSION CONNECTION

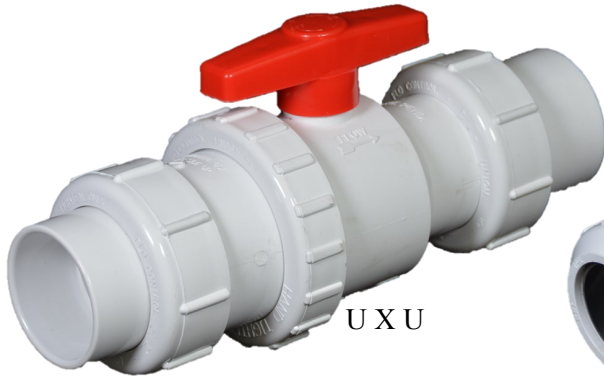

PART NUMBER	LENGTH (INCHES)	MAX DIAMETER (INCHES)	HANDLE RADIUS (INCHES)	WEIGHT (LBS)	IPS CONNECTION SIZE	IPS CONNECTION TYPE
2200-15	7.97	4.00	2	1.55	1 1/2"	U X S
2200-15UC	10.63			1.95		UC X UC
2200-15TU	10.50			2.05		U X U
2200-20	9.19	4.57	2.5	2.25	2"	U X S
2200-20UC	12.44			2.90		UC X UC
2200-20TU	12.25			3.00		U X U
2200C20TU	12.25			3.00		U X U

NOTE: LENGTH VARIES WITH TIGHTNESS OF END NUT

