


## EZFLOW

30-SIEVE GEOTEXTILE MESH

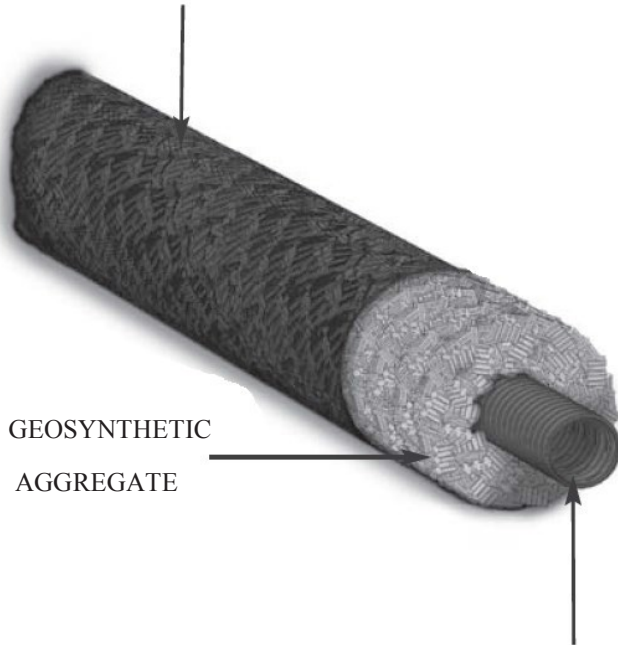

GEOSYNTHETIC  
AGGREGATE

3", 4", OR 6" SLOTTED PIPE

### SLOTTED DRAIN PIPE:

The black, single-wall, corrugated EZflow drainage pipe is constructed of polyethylene resins with high recycled content typically greater than 90%. Pipe meets ASTM F405 standard specifications.

### GEOSYNTHETIC AGGREGATE:

The blue geosynthetic EZflow drainage aggregate is made from 100% recycled polystyrene (EPS) materials.

### GEOTEXTILE MESH:

The 30-sieve geotextile mesh fabric has an apparent opening size of 0.60 mm, a unit weight between 2.5 and 3.5 ounces per square yard, and strength of 100 pounds per square inch in accordance with ASTM D-3786. The flow rate through the mesh is 300 gallons per minute per foot at 3" of head in accordance with ASTM D-4491.

**Storage and Flow for EZflow Drainage Bundles**

Aggregate-Only Bundles			Pipe Bundles		
Product	Storage Volume (gallons / 10-ft bundle)	Flow Capacity (gpm @ 1% slope)	Product	Storage Volume (Gallons / 10-ft bundle)	Flow Capacity (gpm @ 1% slope)
EZ-0701A	8.8	37.1	EZ-0701F	11.4	80.8
EZ-1001A	17.2	75.7	EZ-1001F	21.5	130.9
EZ-1501A	36.5	170.3	EZ-1501F/EZ-1501FB	45.8	345.0

EZ-0701A




NO PIPE

EZ-0701F




3" PIPE  
(CENTERED)

EZ-1001A




NO PIPE

EZ-1001F



4" PIPE  
(CENTERED)

EZ-1501A




NO PIPE

EZ-1501FB



6" PIPE  
(BOTTOM)

EZ-1501F




6" PIPE  
(CENTERED)



## EZ-DRAIN

30-SIEVE GEOTEXTILE MESH

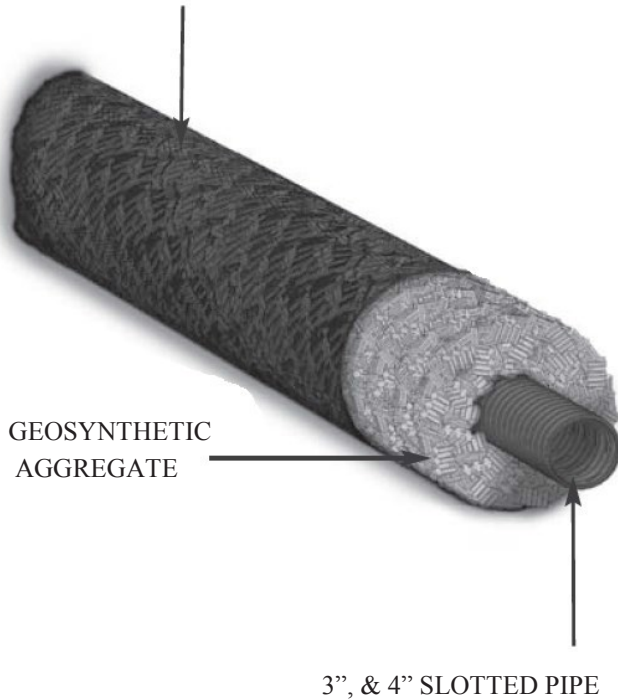

### SLOTTED DRAIN PIPE:

The black, single-wall, corrugated EZflow drainage pipe is constructed of polyethylene resins with high recycled content typically greater than 90%. Pipe meets ASTM F405 standard specifications.

### GEOSYNTHETIC AGGREGATE:

The blue geosynthetic EZflow drainage aggregate is made from 100% recycled polystyrene (EPS) materials.


### GEOTEXTILE MESH:

The 30-sieve geotextile mesh fabric has an apparent opening size of 0.60 mm, a unit weight between 2.5 and 3.5 ounces per square yard, and strength of 100 pounds per square inch in accordance with ASTM D-3786. The flow rate through the mesh is 300 gallons per minute per foot at 3" of head in accordance with ASTM D-4491.

**EZ-0502F**


**&**

**EZ-0802F**



4" PIPE  
(CENTERED)

**EZ-0702F**



3" PIPE  
(CENTERED)

**Storage and Flow for EZflow Drainage Bundles**

Pipe Bundles			
Product	Length	Storage Volume (Gallons / bundle)	Flow Capacity (gpm @ 1% slope)
EZ-0502F	5'	5.7	80.8
EZ-0702F	10'	11.4	80.8
EZ-0802F	10'	15.8	112.7

