

**HOSE THREAD PVC SPRING CHECK VALVE**

RATED @200 PSI STATIC PRESSURE @ 72°F  
 MOLDED IN THE USA  
 MADE OF PVC TYPE I MATERIAL  
 STAINLESS STEEL SPRING  
 EPDM WASHERS & O-RING


NSF/ANSI 61 + 372 LISTED

IPS MPT X IPS FPT

IPS—IRON PIPE SIZE (SAME AS SCHEDULE 40)

FPT—FEMALE PIPE THREAD

MPT—MALE PIPE THREAD

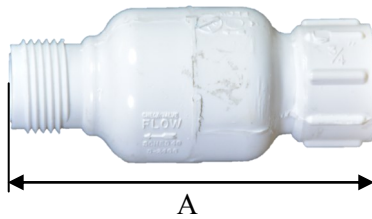

PART #	
OPEN PSI	FULL OPEN PSI

PART NUMBER	SPRING TENSION	A (INCHES)	B (INCHES)	WEIGHT (LBS)	IPS CONNECTION
1/2# SPRING	1/2#	4.13	1.77	0.20	3/4" MHT X 3/4" FHT
1136-07					
1.45 PSI					
1136-07-05	5#				
7.00 PSI					
1136-07-10	10#				
17.46 PSI					

NOTE: VALVE IS CONSIDERED OPEN WHEN SPRING IS COMPRESSED 1/8". FULL OPEN IS COMPLETE COMPRESSION OF SPRING. FOR 1/2" AND 3/4" VALVES FULL OPEN IS APPROXIMATELY 1/8".

NOTE: LENGTH VARIES WITH TIGHTNESS OF END NUT

END NUT MAY BE WHITE OR GRAY

