

VACUUM RELIEF ADJUSTABLE SPRING CHECK VALVE


RATED @200 PSI STATIC PRESSURE @ 72°F
 MOLDED IN THE USA
 MADE OF POLYPROPYLENE
 STAINLESS STEEL SCREW, NUT, WASHER, & SPRING
 VITON WASHER
 EPDM O-RING

ADJUSTING NUT 1 1/2 TURN = 1 LBS FORCE
 FACTORY SET AT 1/2 LBS

1/2" IPS SLIP X 3/4" IPS MPT CONNECTION

IPS—IRON PIPE SIZE (SAME AS SCH. 40 PIPE)
 MPT—MALE PIPE THREAD

COMES WITH POYPROPYLENE CAP FOR 1/2" SLIP SIDE

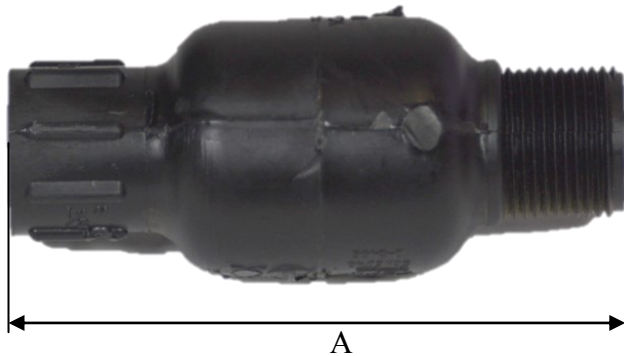

PART NUMBER	A (INCHES)	B (INCHES)	WEIGHT (LBS)
1171V57	4.09	1.76	0.15